


# Illustration of a very good frost resistance

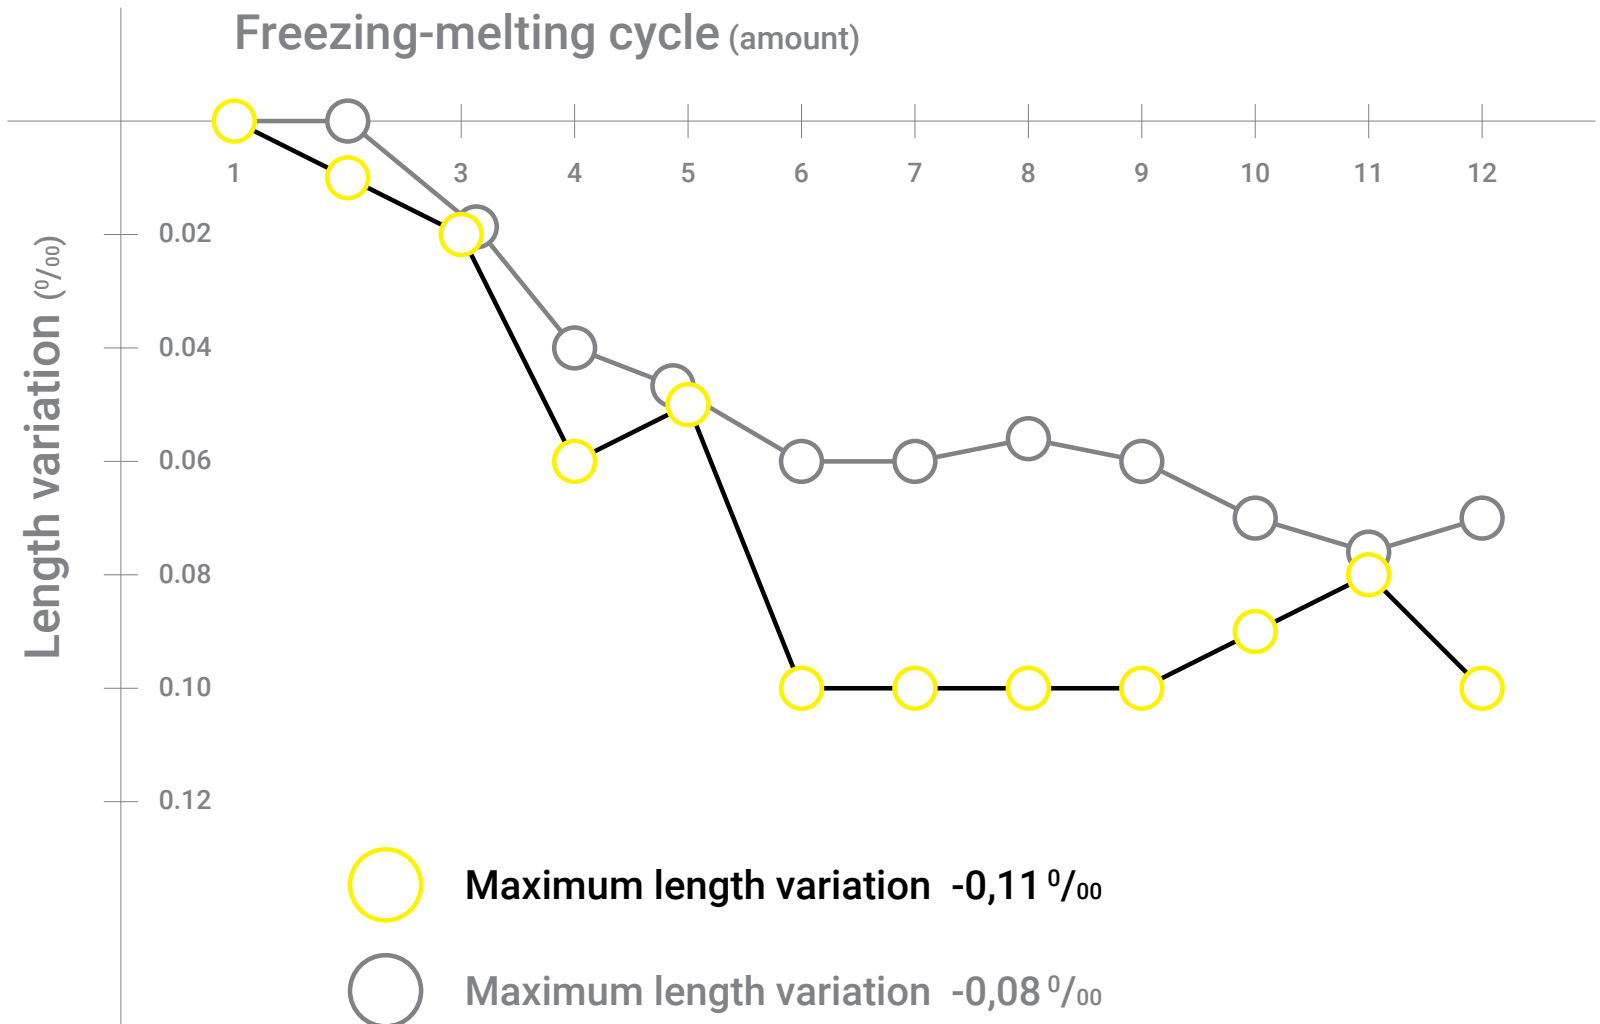

The change in the length of the specimen material in the frost resistance test after the freezing-melting cycle does not exceed 0.1 promil (0.01%). According to the German standard, up to 1 promil is allowed for the concrete. Therefore the StabilRoad is 100 X more efficient!